Warranties

At Ironhart we pride ourselves on supplying products of a high standard. Our warranty periods are extremely competitive and practically designed to give the end user peace of mind. Our dedicated After Sales Service and Warranty team are here to help both retailer and end user customers.

Visit **www.ironhartco.com** for residential and commercial warranty terms and conditions.

PLEASE LEAVE THIS MANUAL WITH THE END USER

For more information, contact us or visit our website:
Aftersales@ironhartco.com | www.ironhartco.com

Updated: 18/05/26

IRONHART INSTALLATION GUIDE

LED Mirrors



ANTONIA



HAMPTON



LUCIANA



DEEJAY

BEFORE INSTALLATION: CHECK ALL PARTS OF PRODUCT THOROUGHLY. INSTALLATION IS ACCEPTANCE OF GOODS AND WILL VOID WARRANTY. MIRRORS ARE FRAGILE. TAKE EXTRA CARE WHILE TRANSPORTING AND HANDLING GOODS.

WWW.IRONHARTCO.COM

LED Mirrors

		Item Code	Overall Size
HAMPTON		LED01-36	36" (w) x 28" (h) 914 (w) x 711 (h) (mm)
		LED01-48	48" (w) x 28" (h) 1219 (w) x 711 (h) mm
ANTONIA		LED03-M	24" (w) x 32" (h) 610 (w) x 813 (h) mm
LUCIANA		LED02-36	36" (w) x 28" (h) 914 (w) x 711 (h) mm
		LED02-48	48" (w) x 28" (h) 1219 (w) x 711 (h) mm
		LED02-56	56" (w) x 28" (h) 1422 (w) x 711 (h) mm
DEEJAY		LED04-28	28" (w) x 28" (h) 711 (w) x 711 (h) mm
		LED04-36	36" (w) x 28" (h) 914 (w) x 711 (h) mm
		LED04-48	48" (w) x 28" (h) 1219 (w) x 711 (h) mm
		LED04-56	56" (w) x 28" (h) 1422 (w) x 711 (h) mm

Features & Specifications

- Changeable colour temperature (3000, 4000 or 6000K)
- Built-in demister
- Illuminating touch sensors for light and demister
- 5mm thick glass mirror
- Includes wall mounting screws and anchor plugs
- 100-120V AC 50/60Hz
- IP44 rating
- UL or ETL certification (ETL certificate number : 5015245)
- **DEEJAY only:** circular magnifying mirror

Please refer to **www.ironhartco.com** for the latest product specifications before installing.

BEFORE INSTALLATION: CHECK ALL PARTS OF PRODUCT THOROUGHLY. INSTALLATION IS ACCEPTANCE OF GOODS AND WILL VOID WARRANTY. MIRRORS ARE FRAGILE. TAKE EXTRA CARE WHILE TRANSPORTING AND HANDLING GOODS.

Mirror Components

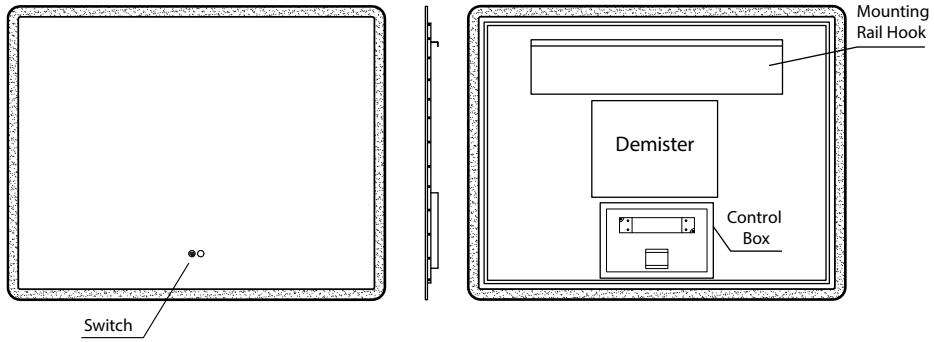

Installation

Mirrors must be installed by a licensed electrician in accordance with local regulations. Ensure mains power has been turned off before installation. Do not install within 1.2 metres of direct wet area contact (e.g. bath or open shower).

NOTE: Mounting screws and anchor plugs are included. It is recommended that the mirror is installed onto a flat uniform wall, and must be screwed into studs or suitable anchors.

Warning

- Please read the instructions carefully before installing the product and ensure this document is kept with the product for future reference to ensure product longevity and in the interest of safety.
- If any modification is made, it will invalidate the warranty and may render the product unsafe.
- This product is designed for installation into a drywall, if mounting onto other substrate ensure appropriate fixing and batons (if required) are used and the load bearing of the wall is sufficient.
- This product is IP44 rated and suitable for installation in Zones 2 and outside Zones 0 & 1 according to the wiring rules.
- It is not suitable for use in saunas, steam rooms and shower cubicles.
- Appropriate circuit protection should be available for the products.
- Take suitable precautions when handling products.
- Do not install and/or use if product is broken or unsafe.
- Always switch off the electrical supply at the mains during installation and maintenance.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


DEMISTER


LED

Operation

LED Light ON/OFF: Touch the round circle quickly once to activate and deactivate.
Dimming: Hold your finger on the round circle for three seconds.
Colour temperature change: Touch the round circle twice in quick succession to switch between 3000K, 4000K or 6000K.
Demister ON/OFF: Touch the round demister circle quickly once to activate and deactivate.